


Габаритные размеры переключателей-разъединителей CSCS

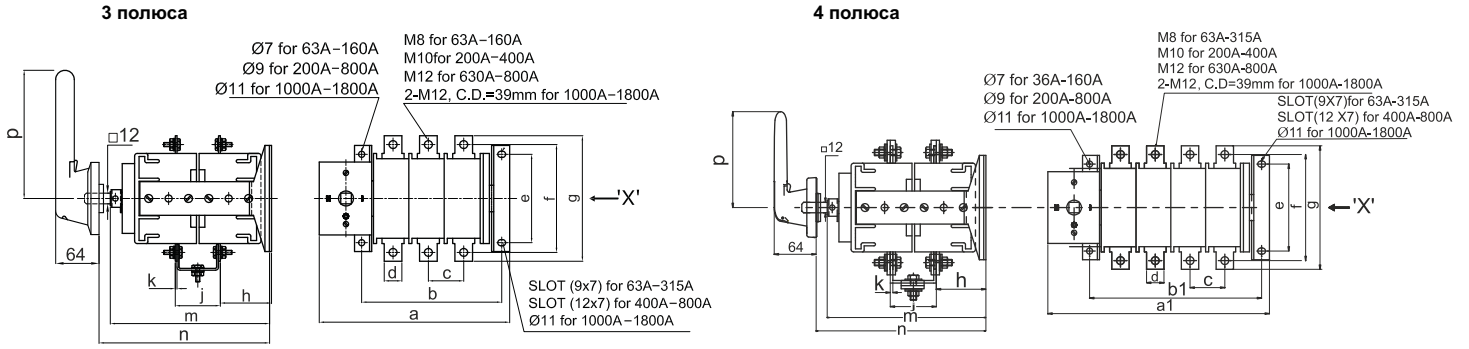


Вид сбоку (от 'X')

Вид сбоку (от 'X')

Параметры	a	a1	b	b1	c	d	e	f	g	h	j	k	m	n	p
63A	215.5	255.5	158.5	198.5	40	20	100	122	142	58	51	2.0	182.5	195-295	145
80A	215.5	255.5	158.5	198.5	40	20	100	122	142	58	51	2.0	182.5	195-295	145
100A	215.5	255.5	158.5	198.5	40	20	100	122	142	58	51	2.0	182.5	195-295	145
125A	215.5	255.5	158.5	198.5	40	20	100	122	142	57	53	3.0	182.5	195-295	145
160A	215.5	255.5	158.5	198.5	40	20	100	122	142	57	53	3.0	182.5	195-295	145
200A	248.5	309.5	191	252	61	25	124	138	163	65.5	81	4.0	242	255-355	145
250A	248.5	309.5	191	252	61	25	124	138	163	65.5	81	4.0	242	255-355	145
315A	248.5	309.5	191	252	61	25	124	138	163	65.5	81	4.0	242	255-355	145
400A	282	352	206	276	70	25	150	180	205	85	96	4.0	262	300-400	220
630A	282	352	206	276	70	40	150	185	223	84	98	5.0	262	300-400	220
800A	282	352	206	276	70	40	150	185	223	84	98	5.0	262	300-400	220
1000A	356	436	278	358	80	50	220	332	372	78	108	12	260	330-450	220
1250A	356	436	278	358	80	50	220	332	372	78	108	12	260	330-450	220
1600A	400	502	322	424	102	50	220	332	372	74	116	16	260	330-450	220
1800A	400	502	322	424	102	50	220	332	372	74	116	16	260	330-450	220
2500A	436	556	358	478	120	50	220	254	372	74	116	12	522	590-690	320
3150A	436	556	358	478	120	50	220	254	372	74	116	16	522	590-690	320

Габаритные размеры обводных переключателей CSBS

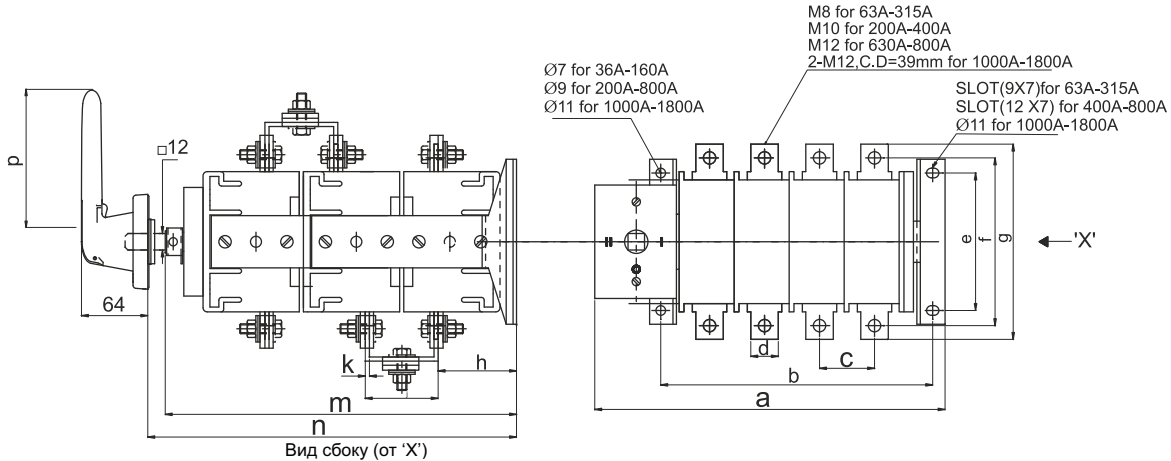

Вид сбоку (от 'X')

Параметры	a	b	c	d	e	f	g	h	j	k	m	n	p
63A	255.5	198.5	40	20	100	122	142	58	51	2.0	255.5	268-368	145
80A	255.5	198.5	40	20	100	122	142	58	51	2.0	255.5	268-368	145
100A	255.5	198.5	40	20	100	122	142	58	51	2.0	255.5	268-368	145
125A	255.5	198.5	40	20	100	122	142	57	53	3.0	255.5	268-368	145
160A	255.5	198.5	40	20	100	122	142	57	53	3.0	255.5	268-368	145
200A	309.5	252	61	25	124	138	163	65.5	81	4.0	345	358-458	145
250A	309.5	252	61	25	124	138	163	65.5	81	4.0	345	358-458	145
315A	309.5	252	61	25	124	138	163	65.5	81	4.0	345	358-458	145
400A	352	276	70	25	150	180	205	85	96	4.0	392	430-530	220
630A	352	276	70	40	150	185	223	84	98	5.0	392	430-530	220
800A	352	276	70	40	150	185	223	84	98	5.0	392	430-530	220
1000A	436	358	80	50	220	332	372	78	108	12	390	460-580	220
1250A	436	358	80	50	220	332	372	78	108	12	390	460-580	220
1600A	502	424	102	50	220	332	372	74	116	16	390	460-580	220
1800A	502	424	102	50	220	332	372	74	116	16	390	460-580	220